SKM 500GA123D

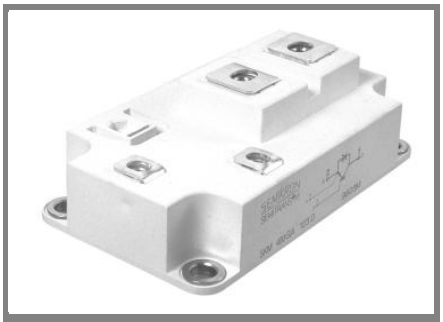

SEMITRANS™4

IGBT Modules

SKM 500GA123D

SKM 500GA123DS

Features

- MOS input (voltage controlled)
- N channel, homgeneous Si
- Low inductance case
- Very low tail current with low temperature dependence
- High short circuit capability, self limiting to 6 x I_{cnom}
- Latch-up free
- Fast & soft CAL diodes
- Isolated copper baseplate using DBC Direct Copper Bonding Technology
- Large clearance (12 mm) and creepage distances (20 mm)

Typical Applications

- Switching (not for linear use)



GA GA...S

Absolute Maximum Ratings T_c = 25 °C, unless otherwise specified

Symbol	Conditions	Values	Units
IGBT			
V_{CES}		1200	V
I_C	T_c = 25 (80) °C	500 (420)	A
I_{CRM}	t_p = 1 ms	800	A
V_{GES}		± 20	V
T_{vj}, (T_{stg})	$T_{OPERATION} \leq T_{stg}$	- 40 ...+ 150 (125)	°C
V_{isol}	AC, 1 min.	2500	V
Inverse diode			
I_F	T_c = 25 (80) °C	500 (350)	A
I_{FRM}	t_p = 1 ms	800	A
I_{FSM}	t_p = 10 ms; sin.; T_j = 150 °C	3600	A

Characteristics T_c = 25 °C, unless otherwise specified

Symbol	Conditions	min.	typ.	max.	Units
IGBT					
$V_{GE(th)}$	V_{GE} = V_{CE}, I_C = 16 mA	4,5	5,5	6,5	V
I_{CES}	V_{GE} = 0, V_{CE} = V_{CES}, T_j = 25 (125) °C		0,1	0,3	mA
$V_{CE(TO)}$	T_j = 25 (125) °C		1,4 (1,6)	1,6 (1,8)	V
r_{CE}	V_{GE} = 15 V, T_j = 25 (125) °C		2,75 (3,75)	3,5 (4,75)	mΩ
$V_{CE(sat)}$	I_{Cnom} = 400 A, V_{GE} = 15 V, chip level		2,5 (3,1)	3 (3,7)	V
C_{ies}	under following conditions		26	40	nF
C_{oes}	V_{GE} = 0, V_{CE} = 25 V, f = 1 MHz		4	5,2	nF
C_{res}			2	2,6	nF
L_{CE}				20	nH
$R_{CC'+EE'}$	res., terminal-chip T_c= 25 (125) °C		0,18 (0,22)		mΩ
$t_{d(on)}$	V_{CC} = 600 V, I_{Cnom} = 400 A		250	600	ns
t_r	R_{Gon} = R_{Goff} = 3,3 Ω, T_j = 125 °C		170	340	ns
$t_{d(off)}$	V_{GE} = ± 15 V		900	1100	ns
t_f			100	125	ns
E_{on} (E_{off})			45 (53)		mJ
Inverse diode					
V_F = V_{EC}	I_{Fnom} = 400 A; V_{GE} = 0 V; T_j = 25 (125) °C		2 (1,8)	2,5	V
$V_{(TO)}$	T_j = 125 () °C			1,2	V
r_T	T_j = 125 () °C		1,5	3	mΩ
I_{RRM}	I_{Fnom} = 400 A; T_j = 25 (125) °C		90 (160)		A
Q_{rr}	di/dt = 2000 A/µs		15 (50)		µC
E_{rr}	V_{GE} = V				mJ
Thermal characteristics					
$R_{th(j-c)}$	per IGBT			0,041	K/W
$R_{th(j-c)D}$	per Inverse Diode			0,09	K/W
$R_{th(c-s)}$	per module			0,038	K/W
Mechanical data					
M_s	to heatsink M6	3		5	Nm
M_t	to terminals M6, M4				Nm
w				330	g

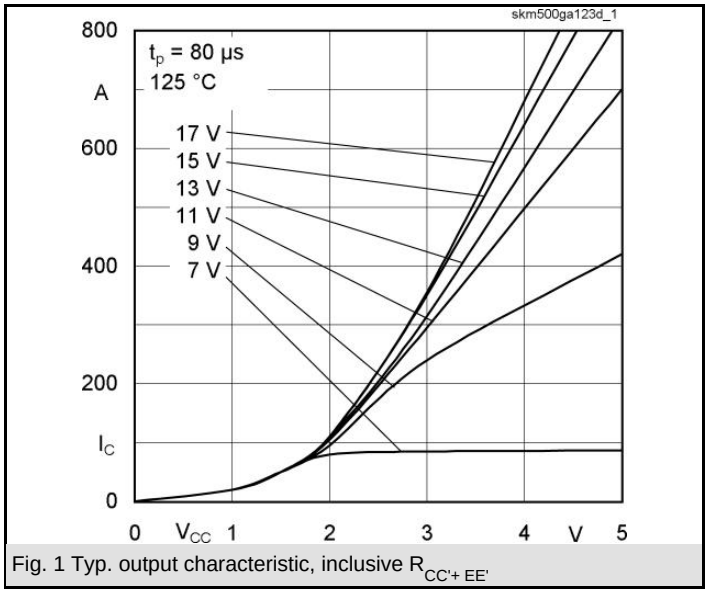

Fig. 1 Typ. output characteristic, inclusive $R_{CC'+EE'}$

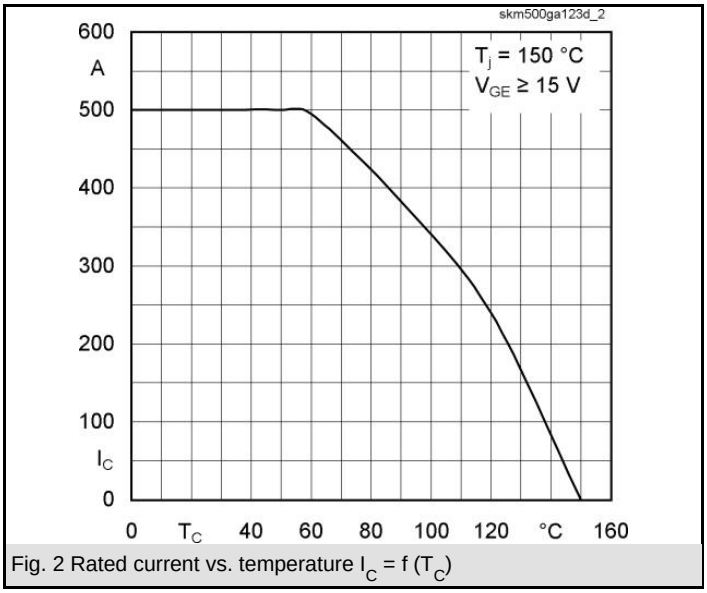

Fig. 2 Rated current vs. temperature $I_C = f(T_C)$

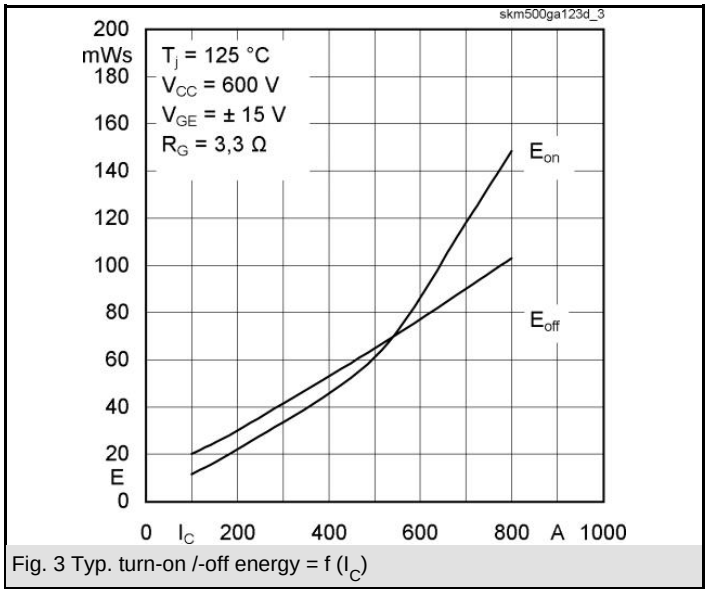

Fig. 3 Typ. turn-on /-off energy = f (I_C)

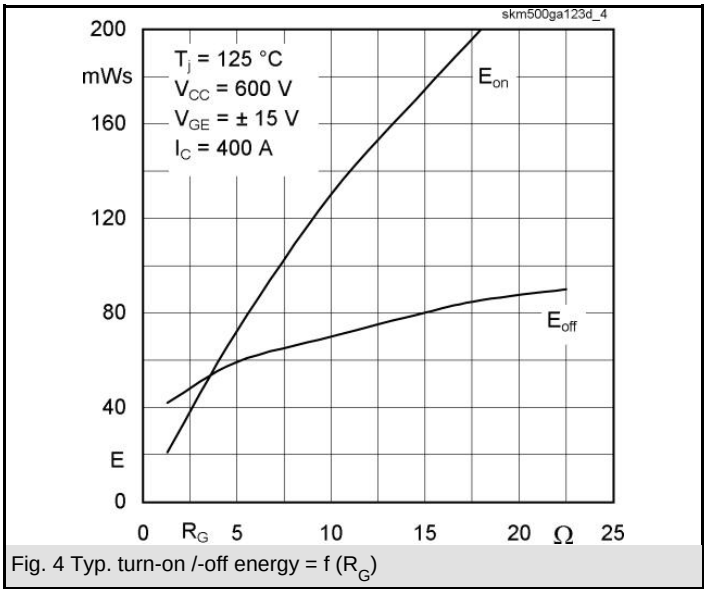

Fig. 4 Typ. turn-on /-off energy = f (R_G)

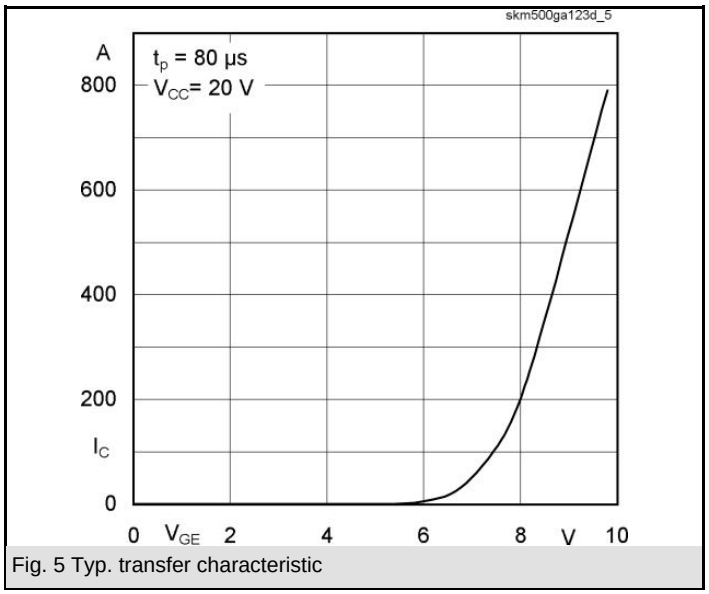

Fig. 5 Typ. transfer characteristic

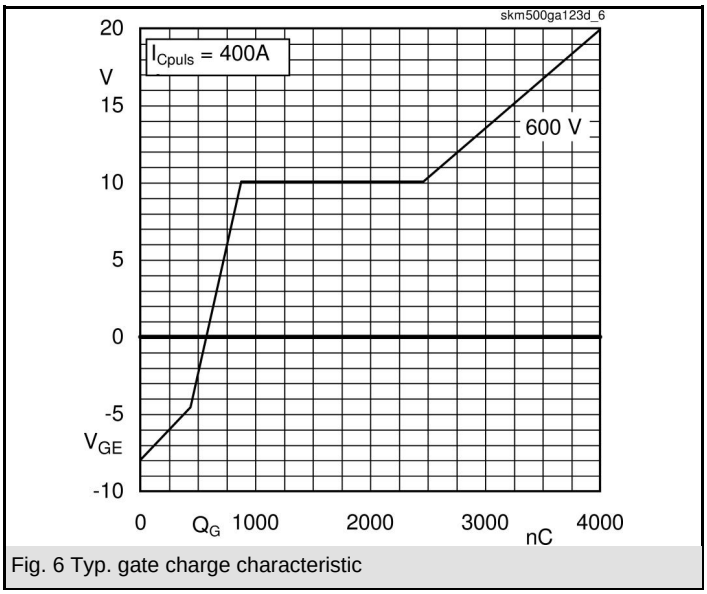

Fig. 6 Typ. gate charge characteristic

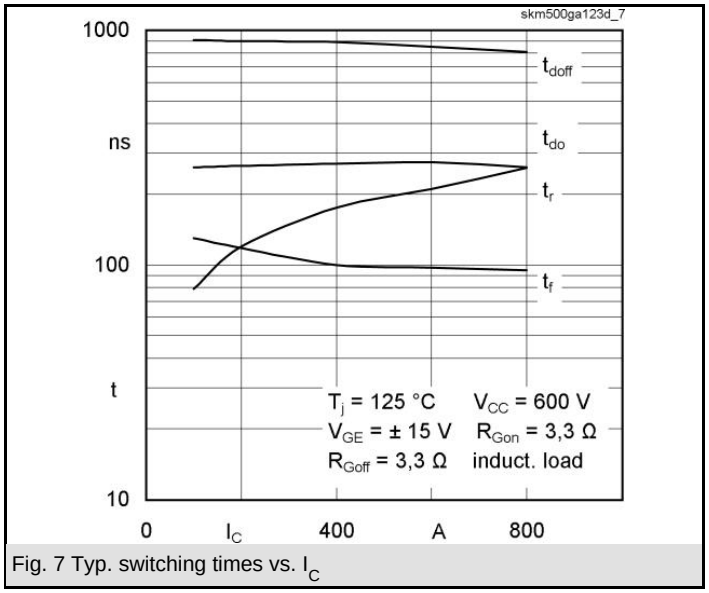

Fig. 7 Typ. switching times vs. I_C

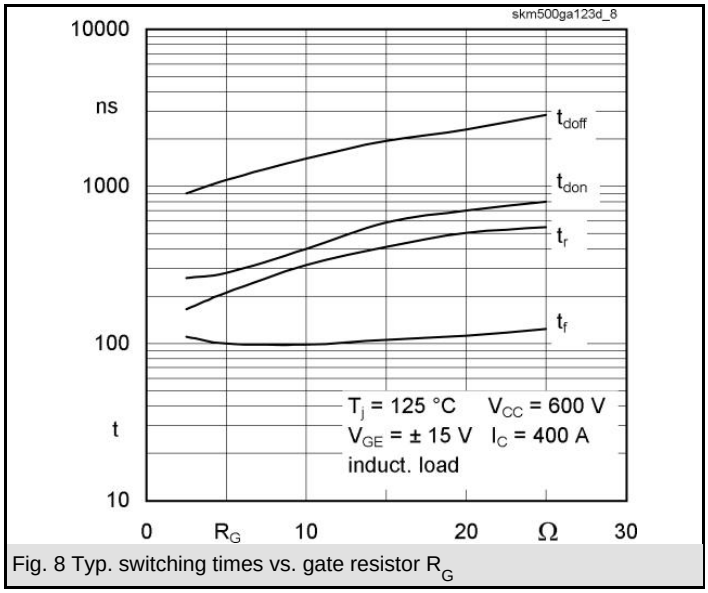

Fig. 8 Typ. switching times vs. gate resistor R_G

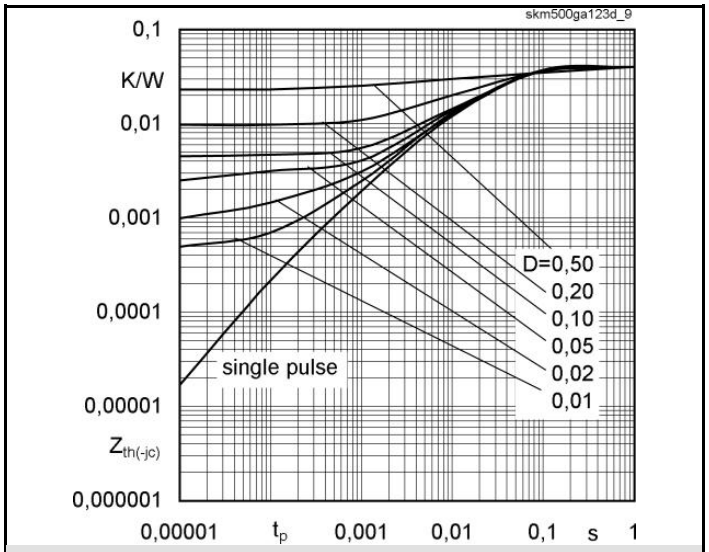

Fig. 9 Transient thermal impedance of IGBT

$Z_{thp(j-c)} = f(t_p)$; $D = t_p/t_c = t_p * f$

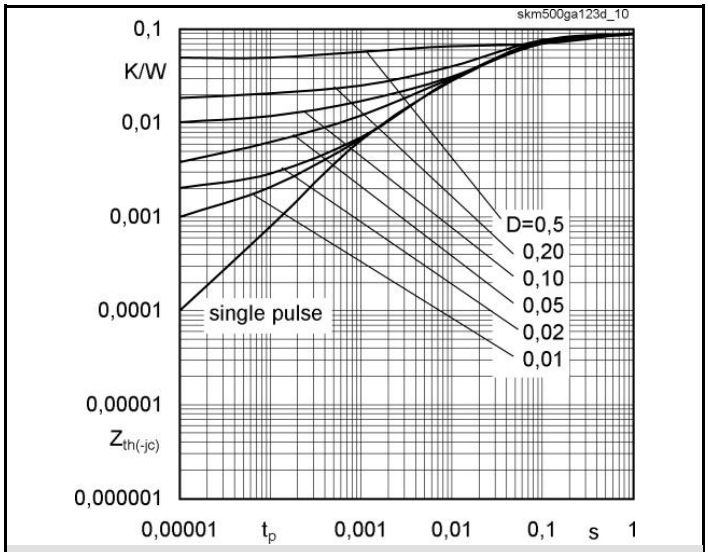

Fig. 10 Transient thermal impedance of FWD

$Z_{thp(j-c)} = f(t_p)$; $D = t_p/t_c = t_p * f$

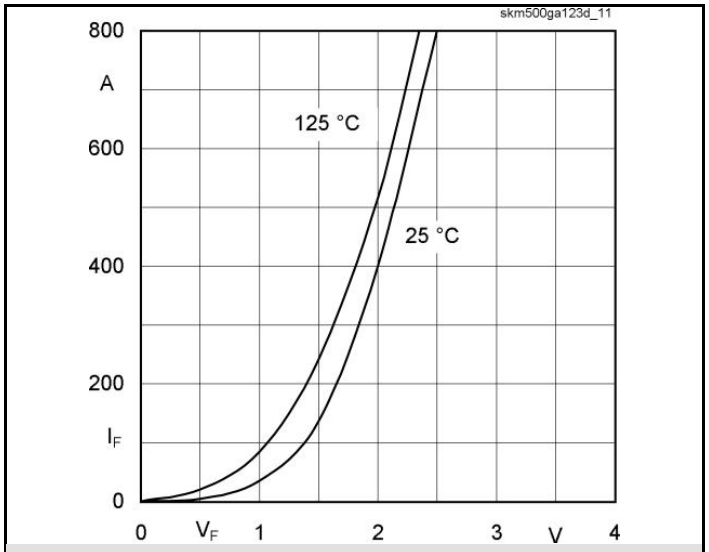

Fig. 11 CAL diode forward characteristic

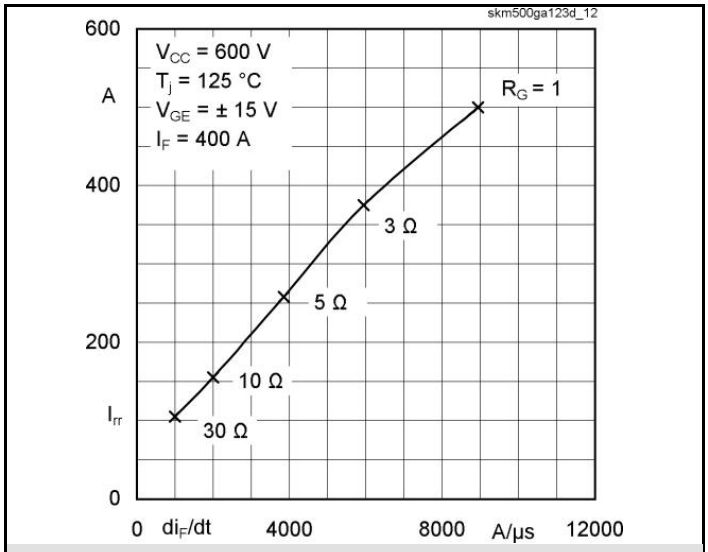

Fig. 12 Typ. CAL diode peak reverse recovery current

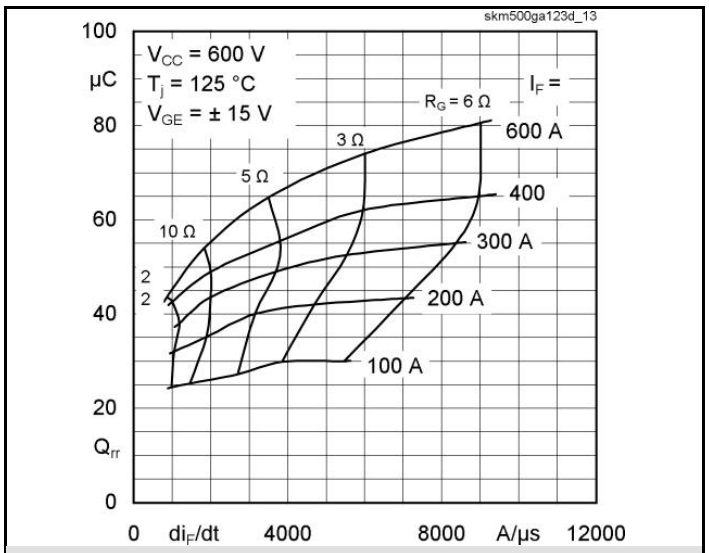

Fig. 13 Typ. CAL diode recovered charge

UL Recognized
File no. E 63 532

Dimensions in mm

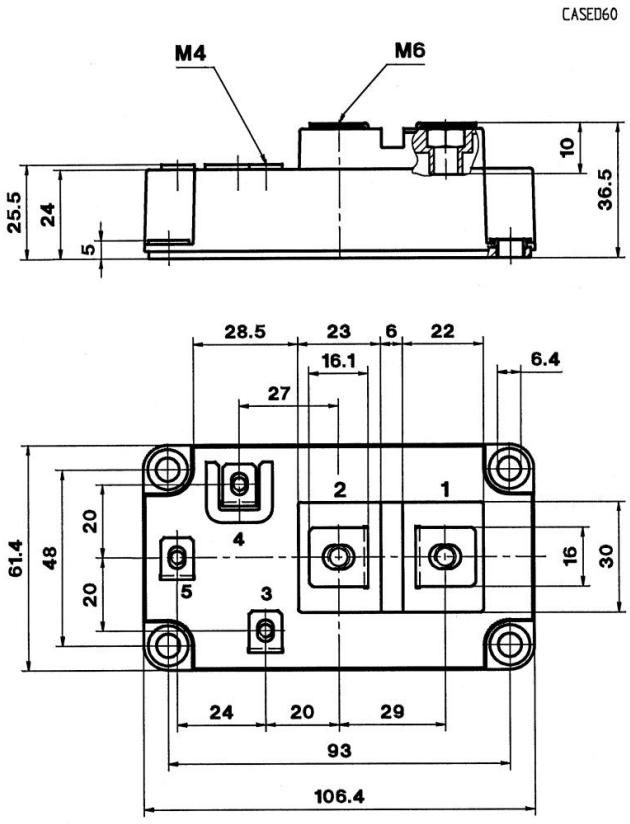

Case D 60

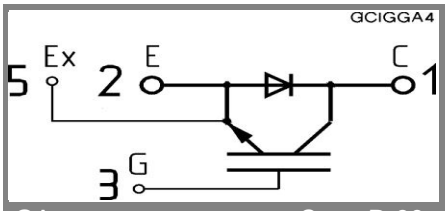

GA Case D 60

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.

